Unmarked tolerances shall be implemented in accordance with ISO 2768-mk.				
1-6 ±0.1	>6-30 ±0.2	>30-120 ±0.3	>120-400 ±0.5	>400-1000 ±0.8

REVISION HISTORY				
REV	DESCRIPTION	DWG CHECK	APPR BY	APPR DATE

Logo
PSN:model
NO:drawing number
NOM torque:**
NOM preload:**
MAX:max preload

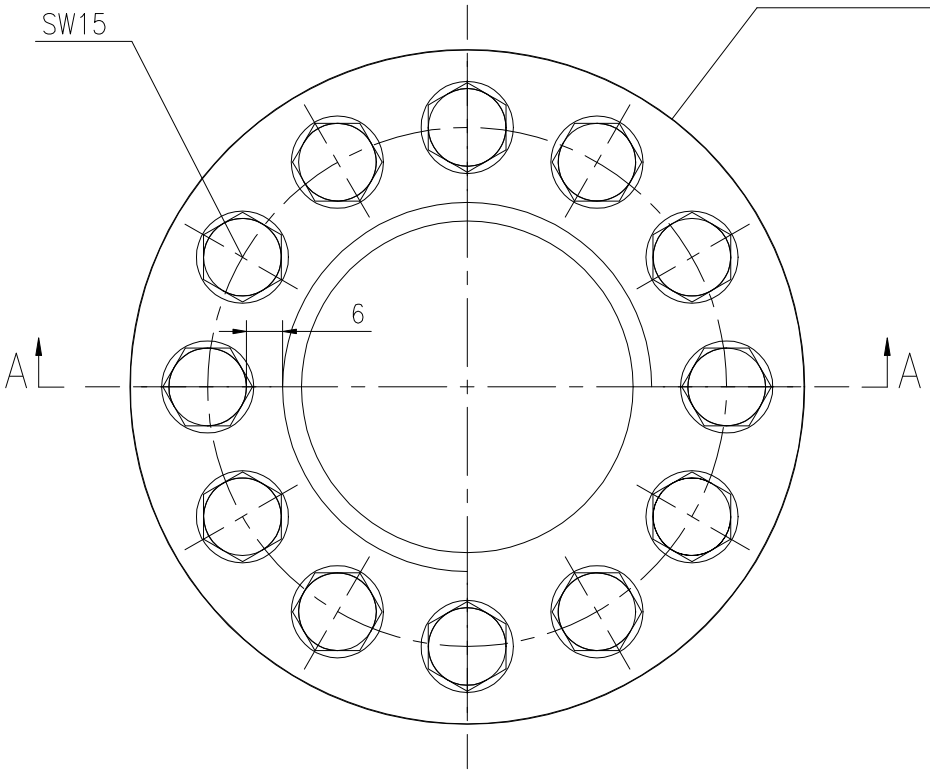

A-A

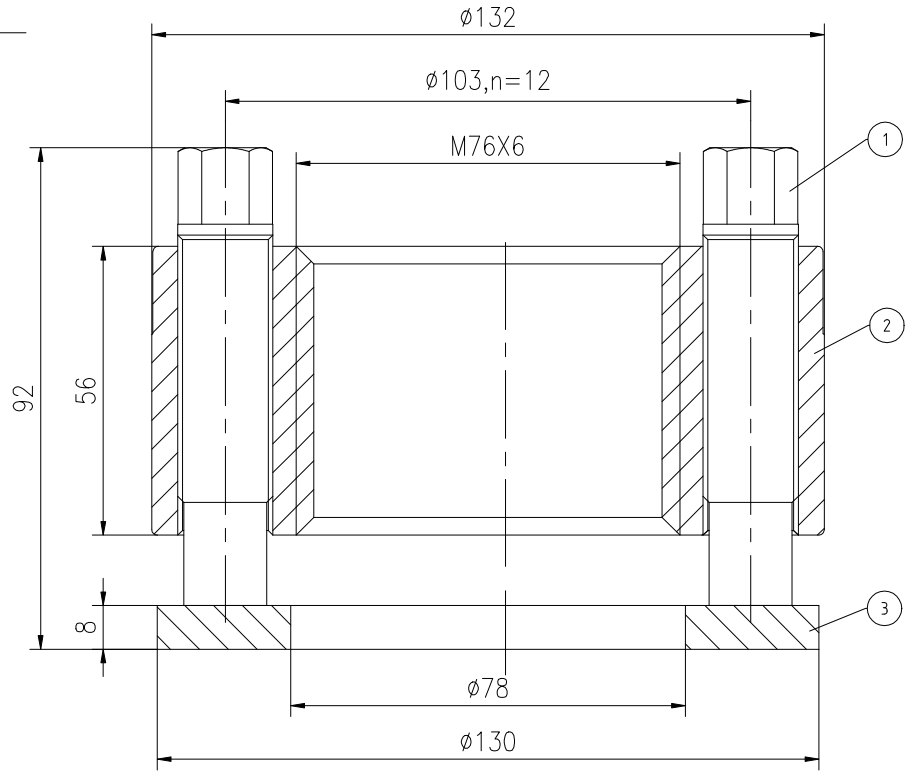

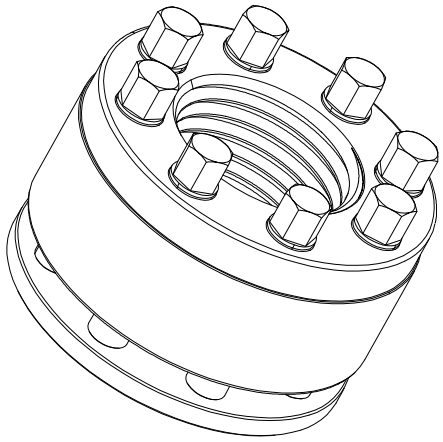

PARTS LIST					
PART	DWG NO.	QTY	DESCRIPTION	MATERIAL	WEIGHT(kg)
1	BAS17.516841	12	Bolt 11/16-16UN-84	CrNiMo	0.16/pcs
2	AS76661M-1	1	Nut M76X6	CrNiMo	2.99
3	AS76661M-3	1	Gasket 78X130X8	CrNiMo	0.53

During on-site installation, please adjust the torque in conjunction with the bolt stretching distance. Without our authorization, the drawings shall not be shared with any third party, and we reserve theright to pursue legal liability against those who disclose the drawings to external parties.

NOM TORQUE	352NM
NOM PRELOAD	1900KN
MAX PRELOAD CAPACITY	2530KN
LUBRICANT	G-N PLUS
TEMPERATURE RATING	-25℃ ~250℃

上海康普曼传动机械有限公司
KPM Power Transmission (Shanghai) Co.,Ltd
+86 021-61301856
Liang.Guo@kpmdrive.com.cn

DESIGNED:	DAYE: 2025.11.03	ASM-76X6		WEIGHT: 5.42kg	
REVIEWED:	DAYE: 2025.11.03			STATE: PRELIMONARY APPROVED	
DRAWN:	DAYE:	DWG NO: AS76661M	SHEET: 1:1		

DWG NO: AS76661M
SHEET: 1:1