
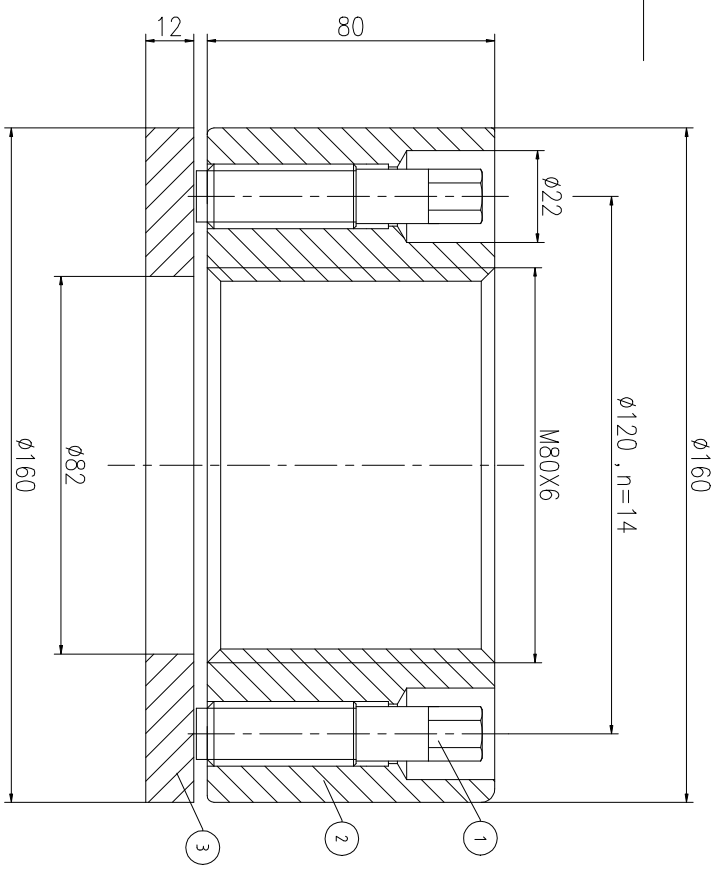


REV	DESCRIPTION	DWG CHECK	APPR BY	APPR DATE

REVISION HISTORY

Logo
 PSN:model
 NO:drawing number
 NOM torque:**
 NOM preload:**
 MAX:max preload

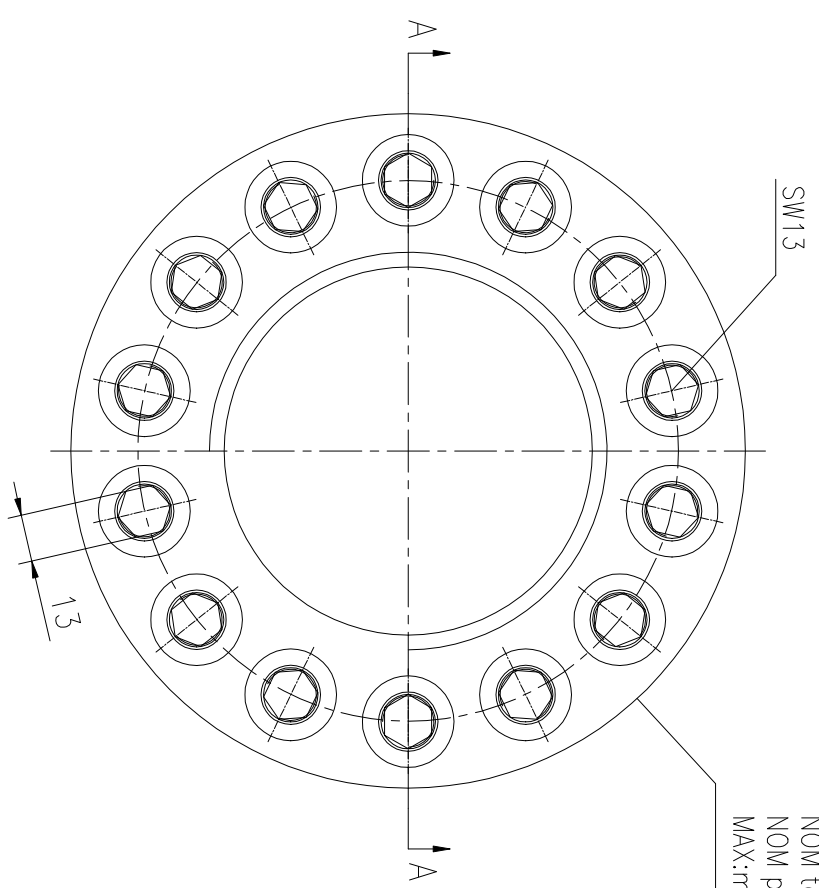


NOM TORQUE	250 NM
NOM PRELOAD	1600 KN
MAX PRELOAD CAPACITY	2135 KN
LUBRICANT	G-N PLUS
TEMPERATURE RATING	-25 C~250 C

PART	DWG NO.	QTY	DESCRIPTION	MATERIAL	WEIGHT(kg)
1	BCHH17.516801	14	Bolt 11/16-16UN-80	CNMo	0.12 / pcs
2	CHH80671M-1	1	Nut M80X6	CNMo	7.75
3	CHH80671M-3	1	Gasket 82X160X12	CNMo	1.40

During on-site installation, please adjust the torque in conjunction with the bolt stretching distance. Without our authorization, the drawings shall not be shared with any third party, and we reserve the right to pursue legal liability against those who disclose the drawings to external parties.

上海康普曼传动机械有限公司
 KPM Power Transmission (Shanghai) Co.,Ltd
 +86 021-61301856
 Liang.Guo@kpmdrive.com.cn
 DESIGNED: DATE: 2025.12.01
 REVIEWED: DATE: 2025.12.01
 DRAWN: DATE:

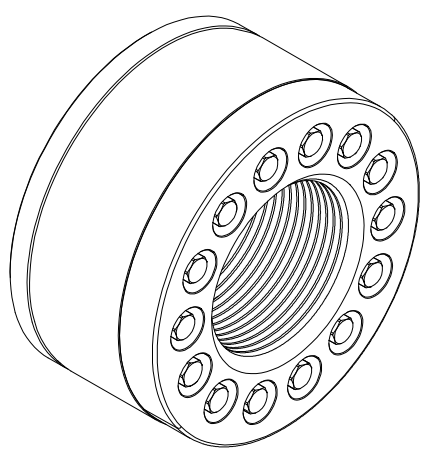

CHHM-80X6
 STATE: PRELIMINARY APPROVED
 WEIGHT: 10.86 kg