Unmarked tolerances shall be implemented in accordance with ISO 2768-mk.				
1-6 ±0.1	>6-30 ±0.2	>30-120 ±0.3	>120-400 ±0.5	>400-1000 ±0.8

REVISION HISTORY				
REV	DESCRIPTION	DWG CHECK	APPR BY	APPR DATE

A-A

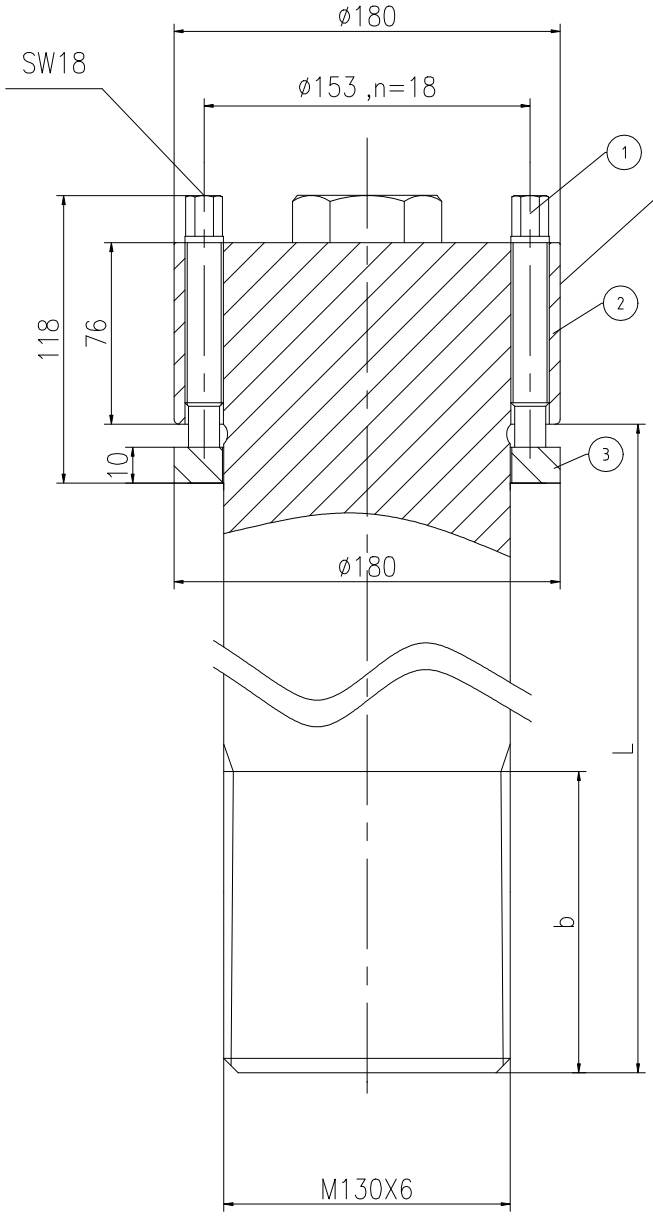

Logo
PSN:model
NO:drawing number
NOM torque:**
NOM preload:**
MAX:max preload

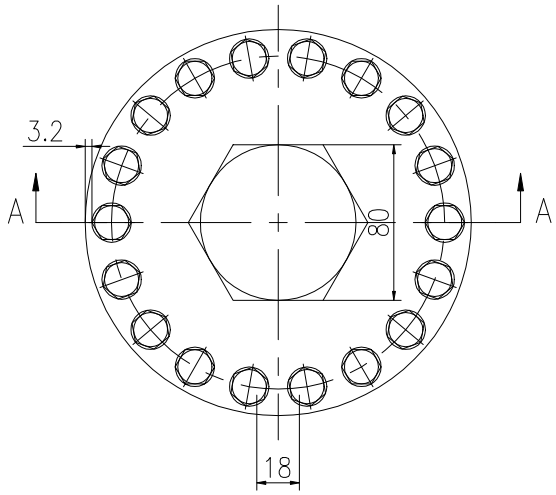

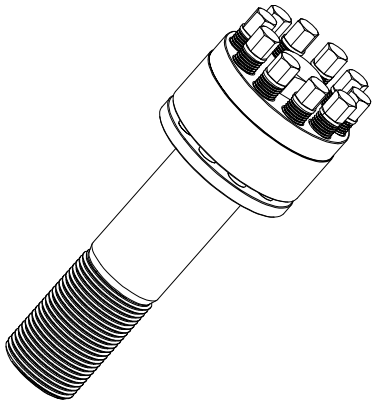

PARTS LIST					
PART	DWG NO.	QTY	DESCRIPTION	MATERIAL	WEIGHT(kg)
1	BBS20.6161081	18	Bolt 13/16-16UN-108	CrNiMo	0.28 /pcs
2	BS130691M-1	1	S-BOLT M130X6	CrNiMo	/
3	BS130691M-3	1	Gasket 130.5X180X10	CrNiMo	0.95

During on-site installation, please adjust the torque in conjunction with the bolt stretching distance. Without our authorization, the drawings shall not be shared with any third party, and we reserve theright to pursue legal liability against those who disclose the drawings to external parties.

NOM TORQUE	564 NM
NOM PRELOAD	3950 KN
MAX PRELOAD CAPACITY	5270 KN
LUBRICANT	G-N PLUS
TEMPERATURE RATING	-25 ℃~250 ℃

上海康普曼传动机械有限公司
KPM Power Transmission (Shanghai) Co.,Ltd
+86 021-61301856
Liang.Guo@kpmdrive.com.cn

DESIGNED:	DAYE: 2025.12.02	BSM-130X6	WEIGHT: /kg	
REVIEWED:	DAYE: 2025.12.02		STATE: PRELIMONARY APPROVED	
DRAWN:	DAYE:	DWG NO: BS130691M	SHEET: 1:1	

DWG NO: BS130691M

SHEET: 1:1

The dimensions at B and L positions are tailored to the customer's specific requests