
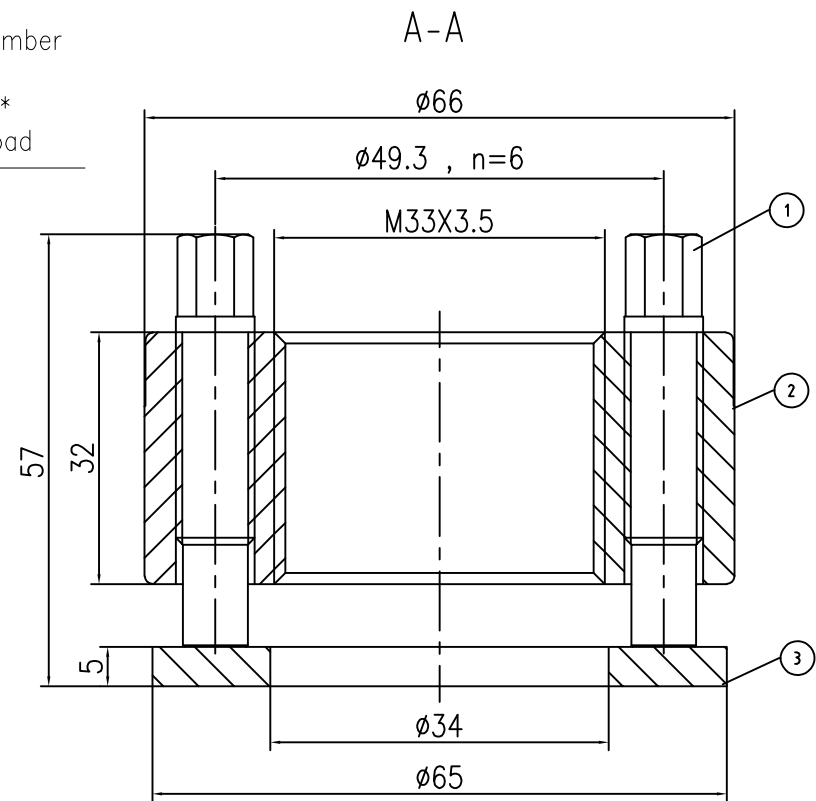


Unmarked tolerances shall be implemented in accordance with ISO 2768-mk.					
1-6 ± 0.1	>6-30 ± 0.2	>30-120 ± 0.3	>120-400 ± 0.5	>400-1000 ± 0.8	

REVISION HISTORY				
REV	DESCRIPTION	DWG CHECK	APPR BY	APPR DATE

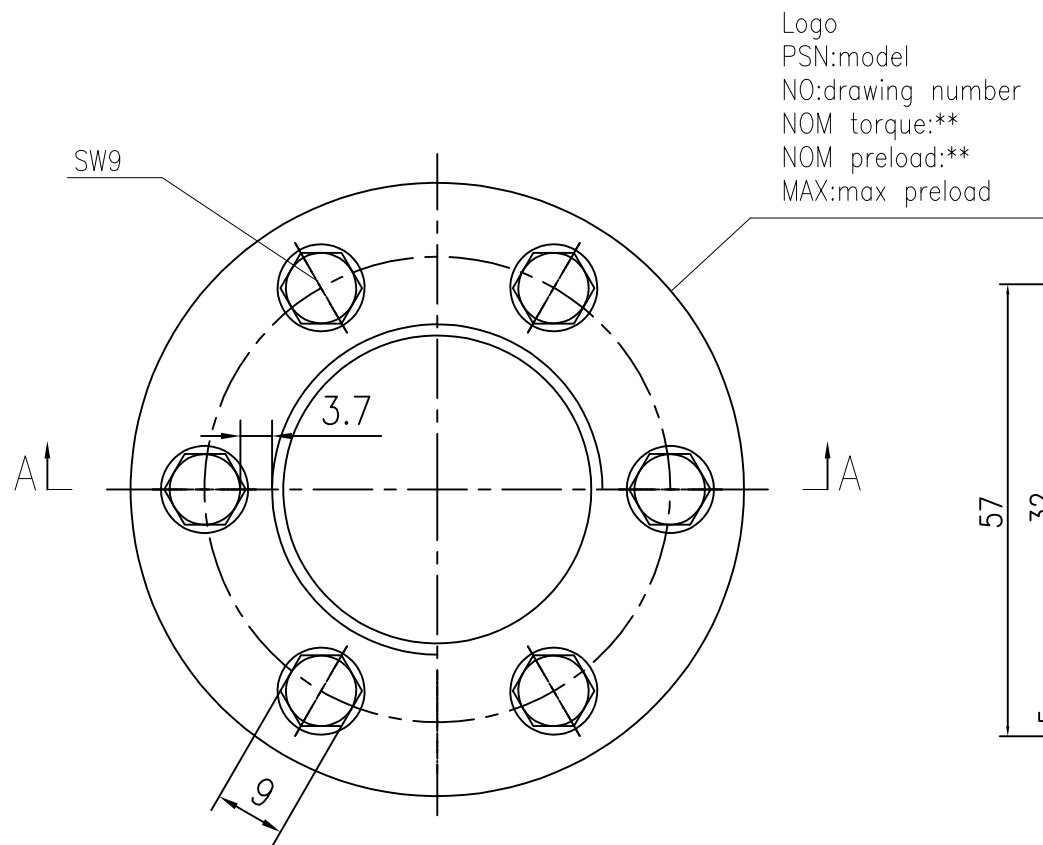

PARTS LIST					
PART	DWG NO.	QTY	DESCRIPTION	MATERIAL	WEIGHT(kg)
1	BAS11.120523	6	Bolt 7/16-20UNF	CrNiMo	0.04/pcs
2	AS333.531H-1	1	Nut M33X3.5	CrNiMo	0.53
3	AS333.531H-3	1	Gasket 34X59X5	CrNiMo	0.09

During on-site installation, please adjust the torque in conjunction with the bolt stretching distance. Without our authorization, the drawings shall not be shared with any third party, and we reserve theright to pursue legal liability against those who disclose the drawings to external parties.

NOM TORQUE	80NM
NOM PRELOAD	345KN
MAX PRELOAD CAPACITY	460KN
LUBRICANT	G-N PLUS
TEMPERATURE RATING	-25 ℃~250 ℃

上海康普曼传动机械有限公司		+86 021-61301856	
KPM Power Transmission (Shanghai) Co.,Ltd		Liang.Guo@kpmdrive.com.cn	
DESIGNED:	DATE: 2025.11.06	ASH-33X3.5	WEIGHT: 0.86kg
REVIEWED:	DATE: 2025.11.06		STATE:
DRAWN:	DATE:		PRELIMONARY APPROVED
	DWG NO: AS333.531H	SHEET: 1:1	