
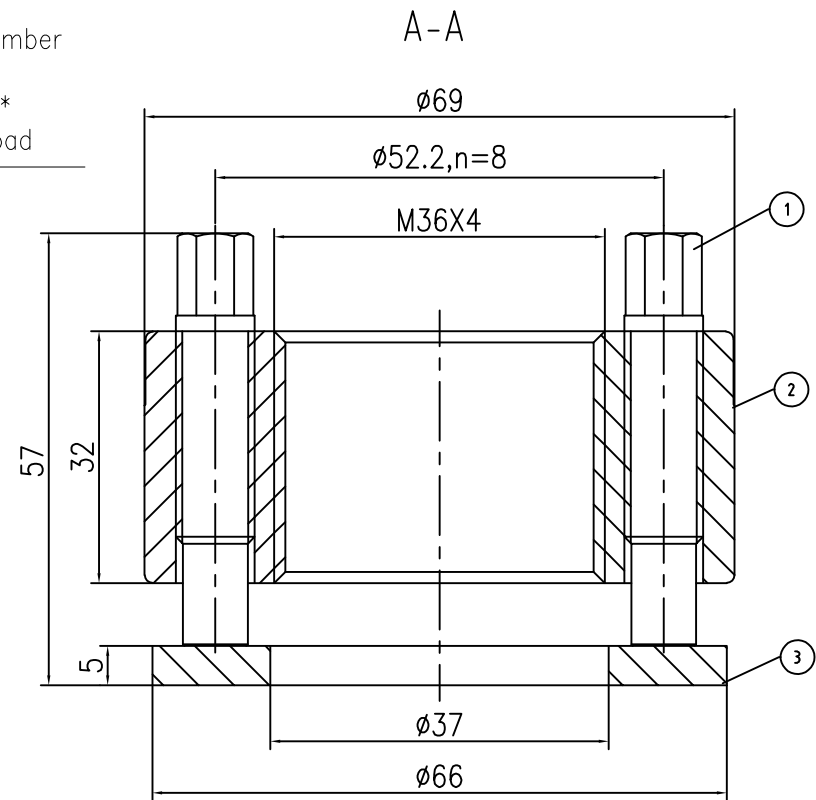


Unmarked tolerances shall be implemented in accordance with ISO 2768-mk.				
1-6 ± 0.1	>6-30 ± 0.2	>30-120 ± 0.3	>120-400 ± 0.5	>400-1000 ± 0.8

REVISION HISTORY				
REV	DESCRIPTION	DWG CHECK	APPR BY	APPR DATE

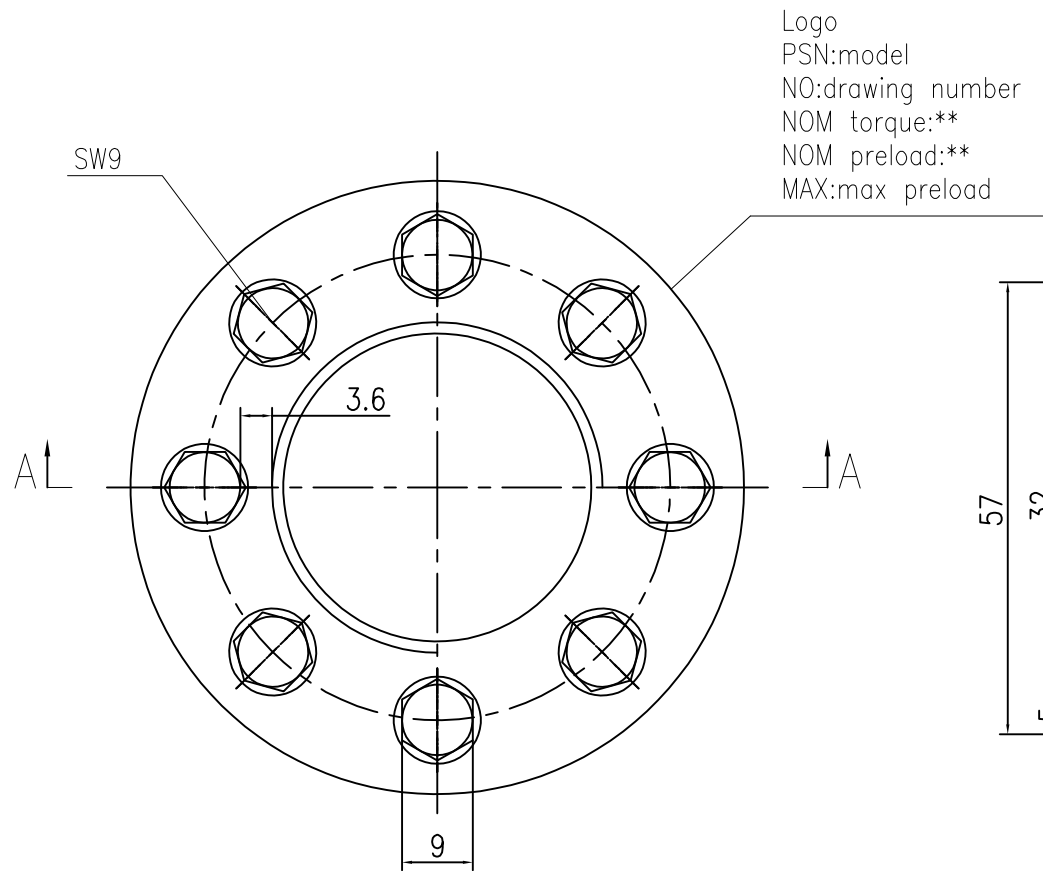

PARTS LIST					
PART	DWG NO.	QTY	DESCRIPTION	MATERIAL	WEIGHT(kg)
1	BAS11.120523	8	Bolt 7/16-20UNF	CrNiMo	0.04/pcs
2	AS36441H-1	1	Nut M36X4	CrNiMo	0.53
3	AS36441H-3	1	Gasket 37X66X5	CrNiMo	0.1

During on-site installation, please adjust the torque in conjunction with the bolt stretching distance. Without our authorization, the drawings shall not be shared with any third party, and we reserve theright to pursue legal liability against those who disclose the drawings to external parties.

NOM TORQUE	80NM
NOM PRELOAD	455KN
MAX PRELOAD CAPACITY	610KN
LUBRICANT	G-N PLUS
TEMPERATURE RATING	-25 ℃~250 ℃

上海康普曼传动机械有限公司		+86 021-61301856	
KPM Power Transmission (Shanghai) Co.,Ltd		Liang.Guo@kpmdrive.com.cn	
DESIGNED: DAYE: 2025.11.06	ASH-36X4	WEIGHT: 0.95kg	
REVIEWED: DAYE: 2025.11.06		STATE: PRELIMONARY APPROVED	
DRAWN: DAYE:	DWG NO: AS36441H	SHEET: 1:1	